

KION 4,8W IP66

Incassi calpestabili / Recess walk-over spotlights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 290	G
3000	90	~ 340	G
4000	80	~ 350	G


2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 60598 2-13 -- EN 62471 -- EN 62031



Kion flat surface 4,8W IP66



INCLUDED

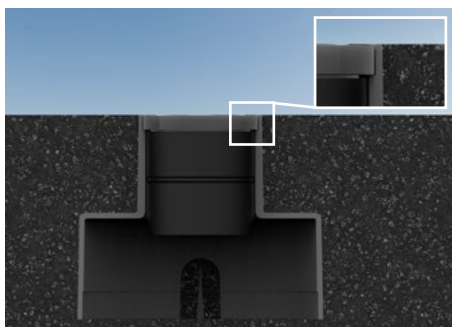

Codice/Cod: **3220**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Raso / Trimless	PMMA ☐ OPAL PMMA	4000 K 3000 K 2700 K	Diffused

ACCESSORI / ACCESSORIES

305000013	Controcassa / Outer casing
330002100	(Vin 220/240Vac) 500mA - 6W
330008800	(Vin 220/240Vac) 500mA - 10W
330002200	(Vin 220/240Vac) 500mA - 22W (min 6W)
330006800	(Vin 220/240Vac) 500mA - 14W - IP67
330009800	(Vin 220/240Vac) 500mA - 28W (min 14W) - IP67
330007200	(Vin 220/240Vac) 500mA - 23W (min 4.5W) - Dimmer Push, 0-10, 1-10, DALI
307500010	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
307500020	Connettore IP68 / IP68 connector
307500027	Interruzione cavo 2 poli sistema NO-W / NO-W system, 2 pole cable interrupting
307500041	Sistema NOW con convertitore 24Vdc - 500mA / NOW System with 24vdc - 500mA converter

Descrizione / description

Faretto da incasso a soffitto e pavimento IP66, potenza 4.8W. Installazione con controcassa su muratura. Flangia a filo pavimento / soffitto (solo tondo), in PMMA, corpo in alluminio anodizzato nero. Finitura della flangia PMMA satinata. Disponibili nelle temperature colore 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottica diffusa. Fornite con 1m di cavo neoprene sezione 2x0.5mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente

Ceiling and floor recessed spotlights IP66, wattage 4.8W. Installation with housing box in masonry. Flange flush floor/ceiling (round only), made of PMMA, housing made of black anodized aluminum. PMMA flange in satin finish. Available in color temperatures 2700K - CRI 90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Diffuse optics. Supplied with 1m neoprene cable with 2x0.5mm cross-section. Service life L80 B20 at 100.000h Ta (ambient temperature) 25°. Power supply must be ordered separately.