

LIVIT

Segnapassi / Guide lights




KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 240	F
3000	90	~ 240	F
4000	80	~ 300	F

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1
EN 60598-2-2 -- EN 62471 -- EN 62031



Livit

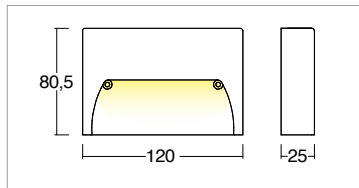

Codice/Cod: **3436**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Quadrato / Square	Anthracite ■ RAL 7016 White □ RAL 9010 Grey ■ RAL 7042 Black ■ RAL 9005 Cor-ten ■ SX350F MA.SA.	4000 K 3000 K 2700 K	Asymmetric

ACCESSORI / ACCESSORIES

330002100	(Vin 220/240Vac) 500mA - 6W
330008800	(Vin 220/240Vac) 500mA - 10W
330002200	(Vin 220/240Vac) 500mA - 22W (min 6W)
330006800	(Vin 220/240Vac) 500mA - 14W - IP67
330007200	(Vin 220/240Vac) 500mA - 23W (min 4.5W) - Dimmer Push, 0-10, 1-10, DALI
330009800	(Vin 220/240Vac) 500mA - 28W (min 14W) - IP67
307500016	Cavo PVC bianco 2x0.35 / PVC white cable 2x0.35
305000035	Scatola standard 503 / Outr casing standard 503

Descrizione / description

Faretto segnapasso a parete per esterni IP65 da 3W. Installazione a parete o su controcassa standard 503. Corpo in alluminio, finitura ottenuta mediante verniciatura a polvere. Disponibile nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 3. Emissione luce diffusa rivolta verso il basso. Prodotto fornito con 1m di cavo PVC bianco sezione 2x0.35mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

IP65 3W outdoor wall-mounted spotlight. Wall installation or on standard 503 back box. Aluminium body, powder-coated finish. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 3. Diffused downward light emission. Product supplied with 1m white PVC cable 2x0.35mm section. Service life L80 B20 at 100,000h Ta (ambient temperature) 25°. Ballast to be ordered separately.



M&M luce s.r.l.

Via del lavoro 36, 31013 Codognè (TV) Tel 0438 778307 Mail info@mmluce.com Web www.mmluce.com