


# ESYR 12,5W

Proiettori / Floodlights

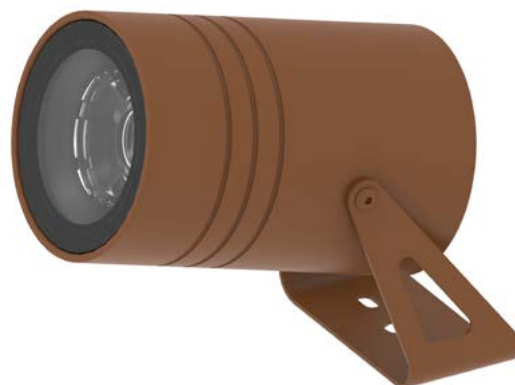


| KELVIN | CRI | LUMEN EFFETTIVI<br>/ REAL OUTPUT | CLASSE ENERGETICA<br>/ ENERGY CLASS |
|--------|-----|----------------------------------|-------------------------------------|
| 2700   | 90  | ~ 1190                           | F                                   |
| 3000   | 90  | ~ 1400                           | E                                   |
| 4000   | 80  | ~ 1410                           | E                                   |

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
-- EN 62471 -- EN 62031



## Esyr 12,5W

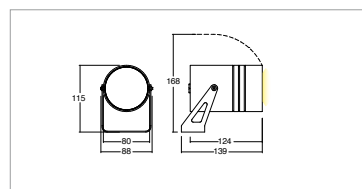

Codice/Cod: **3429**

| FORMA<br>SHAPE | FINITURA<br>FINISH                                                                                         | COLORE<br>COLOUR                     | OTTICHE<br>OPTICALS           |
|----------------|------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------|
| Tondo / Round  | Antracite ■ RAL 7016<br>White □ RAL 9010<br>Grey ■ RAL 7042<br>Black ■ RAL 9005<br>Cor-ten ■ SX350F MA.SA. | 4000 K<br>3000 K<br>2700 K<br>2200 K | 20°<br>50°<br>70°<br>Diffused |

### ACCESSORI / ACCESSORIES

|           |                                                                       |
|-----------|-----------------------------------------------------------------------|
| 307500001 | Picchetto in acciaio / Steel picket                                   |
| 330002000 | (Vin 220/240Vac) 350mA - 16W (min 4W)                                 |
| 330006700 | (Vin 220/240Vac) 350mA - 14W - IP67                                   |
| 330007200 | (Vin 220/240Vac) 350mA - 16W (min 3W) - Dimmer Push, 0-10, 1-10, DALI |
| 307500010 | Cavo neoprene 2x0.5 / Neoprene cable 2x0.5                            |
| 307500023 | Anti abbagliamento alveolare / Non dazzling system                    |

Accessorio cannocchiale asimmetrico / Asymmetrical telescope

## Descrizione / description

Proiettori orientabili per uso esterno IP66, potenza 12.5W. Installazione con staffa o picchetto in acciaio. Forma tonda, corpo in alluminio anodizzato. Finitura ottenuta mediante verniciatura a polvere. Disponibili nelle temperature colore 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Ottiche 20°/50°/70°/Diffuso. Forniti con 1m di cavo neoprene sezione 2x0.5 mm. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°.

IP66 adjustable spotlights for outdoor use, wattage 12.5W. Installation with steel bracket or spike. Round shape, anodised aluminium body. Finish obtained by powder-coating. Available in colour temperatures 2200K - CRI65 / 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 2. Optical lenses 20°/50°/70°/diffused light emission. Supplied with 1m of 2x0.5 mm section neoprene cable. Durability L80 B20 at 100.000h Ta (ambient temperature) 25°.