
# JETRO 17W/m

Sistemi lineari / Linear systems

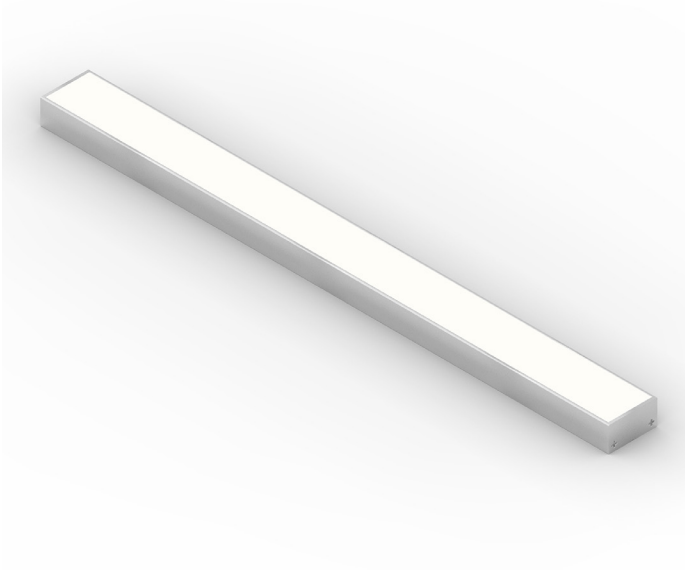


| KELVIN | CRI | LUMEN EFFETTIVI / REAL OUTPUT | CLASSE ENERGETICA / ENERGY CLASS |
|---|---|---|---|
| 2700 | 90 | ~ 1190/m | F |
| 3000 | 90 | ~ 1300/m | F |
| 4000 | 80 | ~ 1390/m | F |

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

W 17/m | 650° FILO INCANDESCENZA | CABLE 1m. | 24Vdc

## Jetro 17W/m



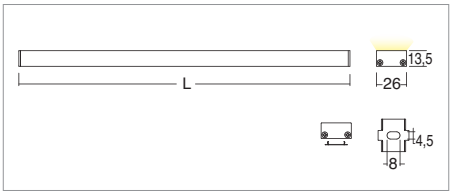


IP 40 | 0,38/m

Codice/Cod: **3069** ... ... ... ... ... ... ... ...

| FORMA SHAPE | ... | FINITURA FINISH | | ... | COLORE COLOUR | ... | OTTICHE OPTICALS | ... | LUNGHEZZA LENGTH | ... ... ... ... |
|---|---|---|---|---|---|---|---|---|---|---|
| Lineare / Linear | 00 | White | RAL 9010 | 3 | 4000 K | 2 | Diffused | 0 | (max 2000) | _ _ _ _ |
| | | Anodized | ANODIZED | 4 | 3000 K | 3 | Transparent | 9 | | |
| | | Black | RAL 9005 | 6 | 2700 K | W | | | | |

| ACCESSORI / ACCESSORIES | |
|---|---|
| 330003300 | (Vin 220/240Vac) 24Vdc - 20W |
| 330003400 | (Vin 220/240Vac) 24Vdc - 60W |
| 330003500 | (Vin 220/240Vac) 24Vdc - 35W |
| 330003100 | (Vin 220/240Vac) 24Vdc - 100W |
| 330007100 | (Vin 220/240Vac) 24Vdc - 150W |
| 330006600 | (Vin 220/240Vac) 24Vdc - 60W - Dimmer Push |
| 330008101 | (Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10 |
| 330008102 | (Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10, DALI |
| 307500018 | Cavo 2X0,35 / Cable 2x0.35 |
| 307501034 | Supporto lineare con clip premontate / Linear support with preinstalled clips |
| 307501035 | Accessorio applicazione con magneti / Magnets application accessory |

## Descrizione / description

Profilo per interni con sorgente led da 17W/m. Versione da installare con clip a scomparsa in acciaio in dotazione. Per pareti non omogenee, esempio muratura, è disponibile come accessorio il fissaggio tramite magneti. Corpo in allumino anodizzato o verniciato e schermo in PMMA opale o trasparente. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Emissione luce diffusa. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore 24Vdc da ordinare separatamente.

Indoor profile with 17W/m LED source. Version to be installed with the supplied concealed steel clip. For non-homogeneous walls, e.g. masonry, fixing by magnets is available as an accessory. Anodized or painted aluminium body and opal or transparent PMMA screen. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Diffused light emission. Supplied with 1m of cable. L80 B20 life at 100,000h Ta (ambient temperature) 25°. 24Vdc power supply to be ordered separately.