# JETRO ADJ 22W/m





| KELVIN | CRI | LUMEN EFFETTIVI / REAL OUTPUT | CLASSE ENERGETICA / ENERGY CLASS |
|---|---|---|---|
| 2700 | 90 | ~ 1560/m | F |
| 3000 | 90 | ~ 1700/m | E |
| 4000 | 80 | ~ 1820/m | E |

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

W 22/m | 650° FILO INCANDESCENZA | CABLE 1m. | 24Vdc

## Jetro Adj 22W/m

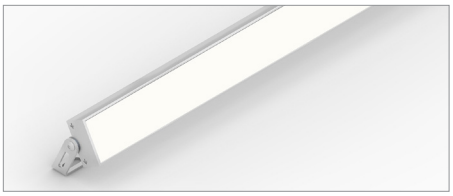

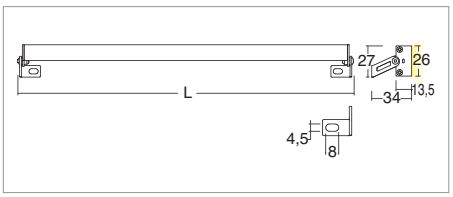


IP 40 | 0,38/m

Codice/Cod: **3072** ... ... ... ... ... ... ... ...

| FORMA SHAPE | ... |
|---|---|
| Lineare / Linear | 00 |

| FINITURA FINISH | | ... |
|---|---|---|
| Anodized | ANODIZED | 4 |
| Black | RAL 9005 | 6 |

| COLORE COLOUR | ... |
|---|---|
| 4000 K | 2 |
| 3000 K | 3 |
| 2700 K | W |

| OTTICHE OPTICALS | ... |
|---|---|
| Diffused | 0 |
| Transparent | 9 |

| LUNGHEZZA LENGTH | ... ... ... ... |
|---|---|
| (max 2000) | _ _ _ _ |

| ACCESSORI / ACCESSORIES | |
|---|---|
| 330003300 | (Vin 220/240Vac) 24Vdc - 20W |
| 330003400 | (Vin 220/240Vac) 24Vdc - 60W |
| 330003500 | (Vin 220/240Vac) 24Vdc - 35W |
| 330003100 | (Vin 220/240Vac) 24Vdc - 100W |
| 330007100 | (Vin 220/240Vac) 24Vdc - 150W |
| 330006600 | (Vin 220/240Vac) 24Vdc - 60W - Dimmer Push |
| 330008101 | (Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10 |
| 330008102 | (Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10, DALI |
| 307500018 | Cavo 2X0,35 / Cable 2x0.35 |

## Descrizione / description

Profilo per interni con sorgente led da 22W/m. Versione da installare con staffe in acciaio orientabili in dotazione. Corpo in allumino anodizzato o verniciato e schermo in PMMA opale o trasparente. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Emissione luce diffusa. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore 24Vdc da ordinare separatamente.

Indoor profile with 22W/m LED source. Version to be installed with the supplied adjustable steel brackets. Anodized or painted aluminium body and opal or transparent PMMA screen. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Diffused light emission. Supplied with 1m of cable. L80 B20 life at 100,000h Ta (ambient temperature) 25°. 24Vdc power supply to be ordered separately.