
MEDEA 22W/m

Sistemi lineari / Linear systems

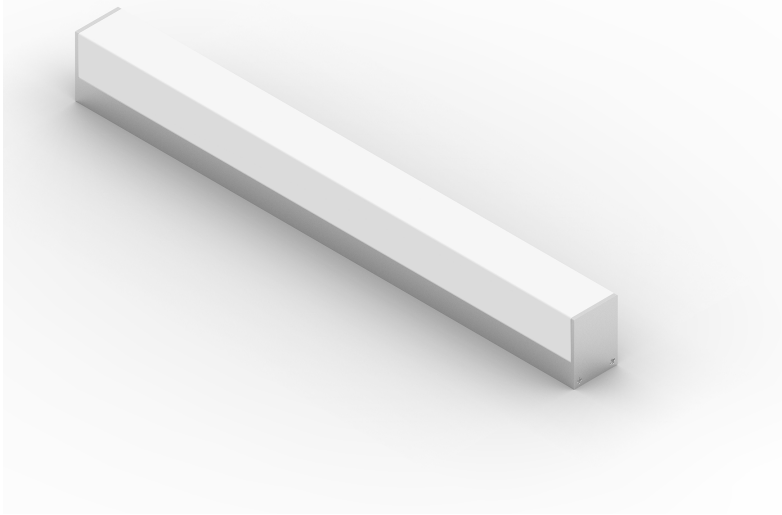


KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 1340/m	F
3000	90	~ 1450/m	F
4000	80	~ 1560/m	E

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

W 22/m | IP 40 | 650° FILO INCANDESCENZA | CE | CABLE 1m. | 24Vdc | KG 0,5/m

Medea 22W/m



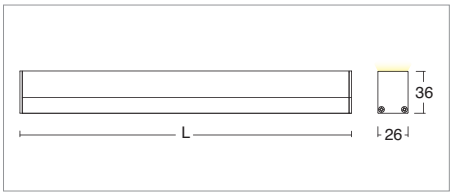

Codice/Cod: **3108** ... ...

FORMA SHAPE	...	FINITURA FINISH		...	COLORE COLOUR	...	OTTICHE OPTICALS	...	LUNGHEZZA LENGTH	... ...
Lineare / Linear	**00**	White	RAL 9010	**3**	4000 K	**2**	Diffused	**0**	(max 2000)	_ _ _ _
		Anodized	ANODIZED	**4**	3000 K	**3**				
		Black	RAL 9005	**6**	2700 K	**W**				

ACCESSORI / ACCESSORIES	
330003300	(Vin 220/240Vac) 24Vdc - 20W
330003400	(Vin 220/240Vac) 24Vdc - 60W
330003500	(Vin 220/240Vac) 24Vdc - 35W
330003100	(Vin 220/240Vac) 24Vdc - 100W
330007100	(Vin 220/240Vac) 24Vdc - 150W
330006600	(Vin 220/240Vac) 24Vdc - 60W - Dimmer Push
330008101	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10
330008102	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10, DALI
307500018	Cavo 2X0,35 / Cable 2x0.35
307501034	Supporto lineare con clip premontate / Linear support with preinstalled clips
307501035	Accessorio applicazione con magneti / Magnets application accessory

Descrizione / description

Profilo per interni con sorgente led da 22W/m. Versione da installare con clip a scomparsa in acciaio in dotazione. Per pareti non omogenee, esempio muratura, è disponibile come accessorio il fissaggio tramite magneti. Corpo in allumino anodizzato o verniciato e schermo in PMMA opale o trasparente. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Emissione luce diffusa su 3 lati. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore 24Vdc da ordinare separatamente.

Indoor profile with 22W/m LED source. Version to be installed with the supplied concealed steel clip. For non-homogeneous walls, e.g. masonry, fixing by magnets is available as an accessory. Anodized or painted aluminium body and opal or transparent PMMA screen. Available in colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80 MacAdam Step 3. Diffused light emission on 3 sides. Supplied with 1m of cable. L80 B20 life at 100,000h Ta (ambient temperature) 25°. 24Vdc power supply to be ordered separately.