JETRO45 17W/m IP65

Sistemi lineari / Linear systems





KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 1190/m	F
3000	90	~ 1300/m	F
4000	80	~ 1390/m	F

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031


W 17/m | 650° FILO INCANDESCENZA | CABLE 1m. | 24Vdc

Jetro45 17W/m IP65

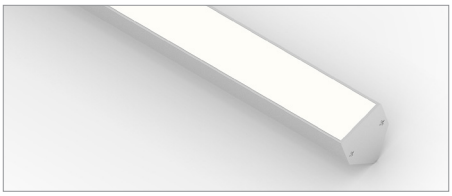

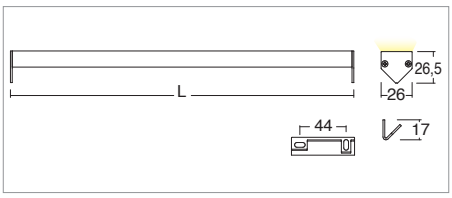

IP 65 | 0,48/m



Codice/Cod: **3132** ... ...

FORMA SHAPE	...	FINITURA FINISH		...	COLORE COLOUR	...	OTTICHE OPTICALS	...	LUNGHEZZA LENGHT	... ...
Lineare / Linear	00	Anodized	ANODIZED	4	4500 K	2	Diffused	0	(max 2000)	_ _ _ _
		Black	RAL 9005	6	3500 K	3	Transparent	9		
					3200 K	W				

ACCESSORI / ACCESSORIES	
330003300	(Vin 220/240Vac) 24Vdc - 20W
330003400	(Vin 220/240Vac) 24Vdc - 60W
330003500	(Vin 220/240Vac) 24Vdc - 35W
330003100	(Vin 220/240Vac) 24Vdc - 100W
330007100	(Vin 220/240Vac) 24Vdc - 150W
330006600	(Vin 220/240Vac) 24Vdc - 60W - Dimmer Push
330008101	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10
330008102	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10, DALI
307500016	Cavo PVC bianco 2X0,35 / White PVC cable 2x0.35

Descrizione / description

Profilo per esterni con sorgente led da 17W/m. Versione da installare ad angolo con staffe in acciaio a 45° in dotazione. Corpo in allumino anodizzato o verniciato e protezione frontale della sorgente in resina poliretanica opale o trasparente. Disponibili nelle temperature colore 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80 MacAdam Step 3. Emissione luce diffusa. Forniti con 1m di cavo in PVC bianco. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore 24Vdc da ordinare separatamente.

Outdoor profile with 17W/m LED source. Version to be installed at an angle with the supplied 45° steel brackets. Anodized or painted aluminium body and front protection of the source in opal or transparent polyurethane resin. Available in colour temperatures 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80 MacAdam Step 3. Diffused light emission. Supplied with 1m of white PVC cable. L80 B20 life at 100,000h Ta (ambient temperature) 25°. 24Vdc power supply to be ordered separately.