SILO 10W IP65

Sistemi lineari / Linear systems





KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 720/m	G
3000	90	~ 750/m	G
4000	80	~760/m	G

2006/95/CE -- 2002 /95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1 -- EN 62471 -- EN 62031

W 10/m | 650° FILO INCANDESCENZA | CABLE 1m. | 24Vdc

Silo 10W/m IP65

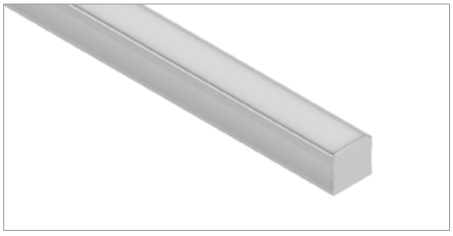

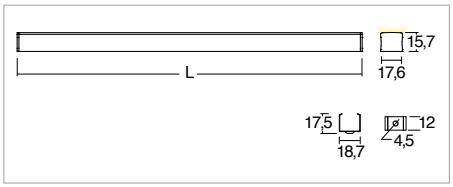

IP 65 | 0,42/m | 650° FILO INCANDESCENZA

Codice/Cod: **3173** ... ...

FORMA SHAPE	...	FINITURA FINISH		...	COLORE COLOUR	...	OTTICHE OPTICALS	...	LUNGHEZZA LENGHT	... ...
Lineare / Linear	00	Anodized	ANODIZED	4	4500 K	2	Diffused	0	(max 2000)	_ _ _ _
		Black	RAL 9005	6	3500 K	3	Transparent	9		
					3200 K	W				

ACCESSORI / ACCESSORIES	
330003300	(Vin 220/240Vac) 24Vdc - 20W
330003400	(Vin 220/240Vac) 24Vdc - 60W
330003500	(Vin 220/240Vac) 24Vdc - 35W
330003100	(Vin 220/240Vac) 24Vdc - 100W
330007100	(Vin 220/240Vac) 24Vdc - 150W
330006600	(Vin 220/240Vac) 24Vdc - 60W - Dimmer Push
330008101	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10
330008102	(Vin 24Vdc) - 240W - Dimmer Push, 0-10, 1-10, DALI
307500016	Cavo PVC bianco 2X0,35 / White PVC cable 2x0.35

Descrizione / description

Lineare per esterni 10W/m. Disponibile in versione plafone con staffe e accessorio fissaggio con magneti. Corpo in allumino anodizzato o verniciato e schermo in resina opale o trasparente. Disponibili nelle temperature colore 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80. MacAdam Step 2. Emissione luce diffusa. Forniti con 1m di cavo. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

Linear profile for outdoor use 10W/m. Available in ceiling version with brackets and magnetic fixing as accessories. Body in anodized or painted aluminum and diffuser in opal or transparent resin. Available in color temperatures 3200K - CRI90 / 3500K - CRI 90 / 4500K - CRI80. MacAdam Step 2. Diffuse light emission. Supplied with 1m cable. Lifespan L80 B20 at 100.000h Ta (ambient temperature) 25°. Ballast to be ordered separately.